
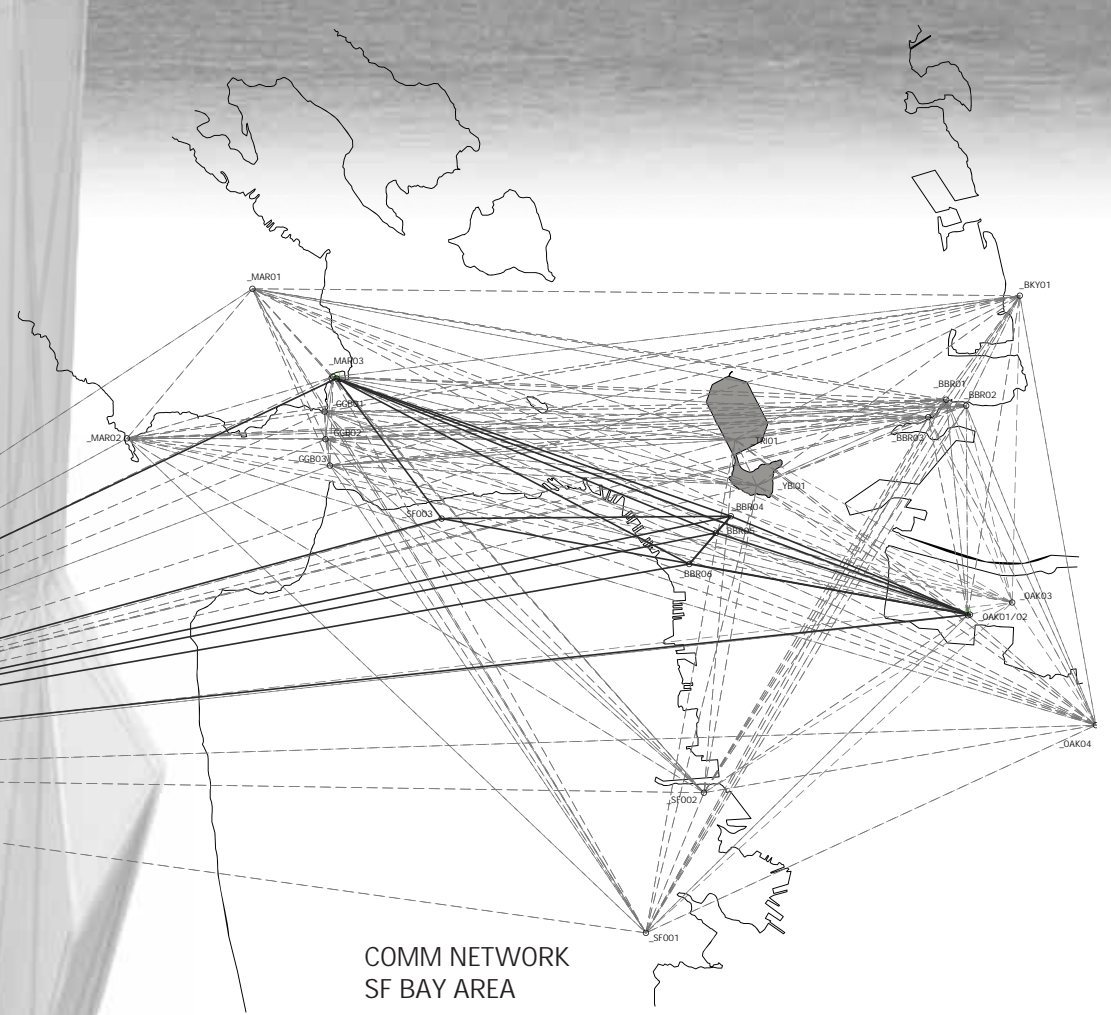



>>INFORMATIC VORONOI

arises out of the analysis of the network space existing between nodes of program. This bundling of informatic transfer between nodes, or protocol, determines the location and quality of a membrane condition between two disparate programs. Morphogenic strategy employs a 2D Voronoi algorithm, chosen because of its natural disposition to define itself by its expression of boundary.

>>INFORMATIC VORONOI

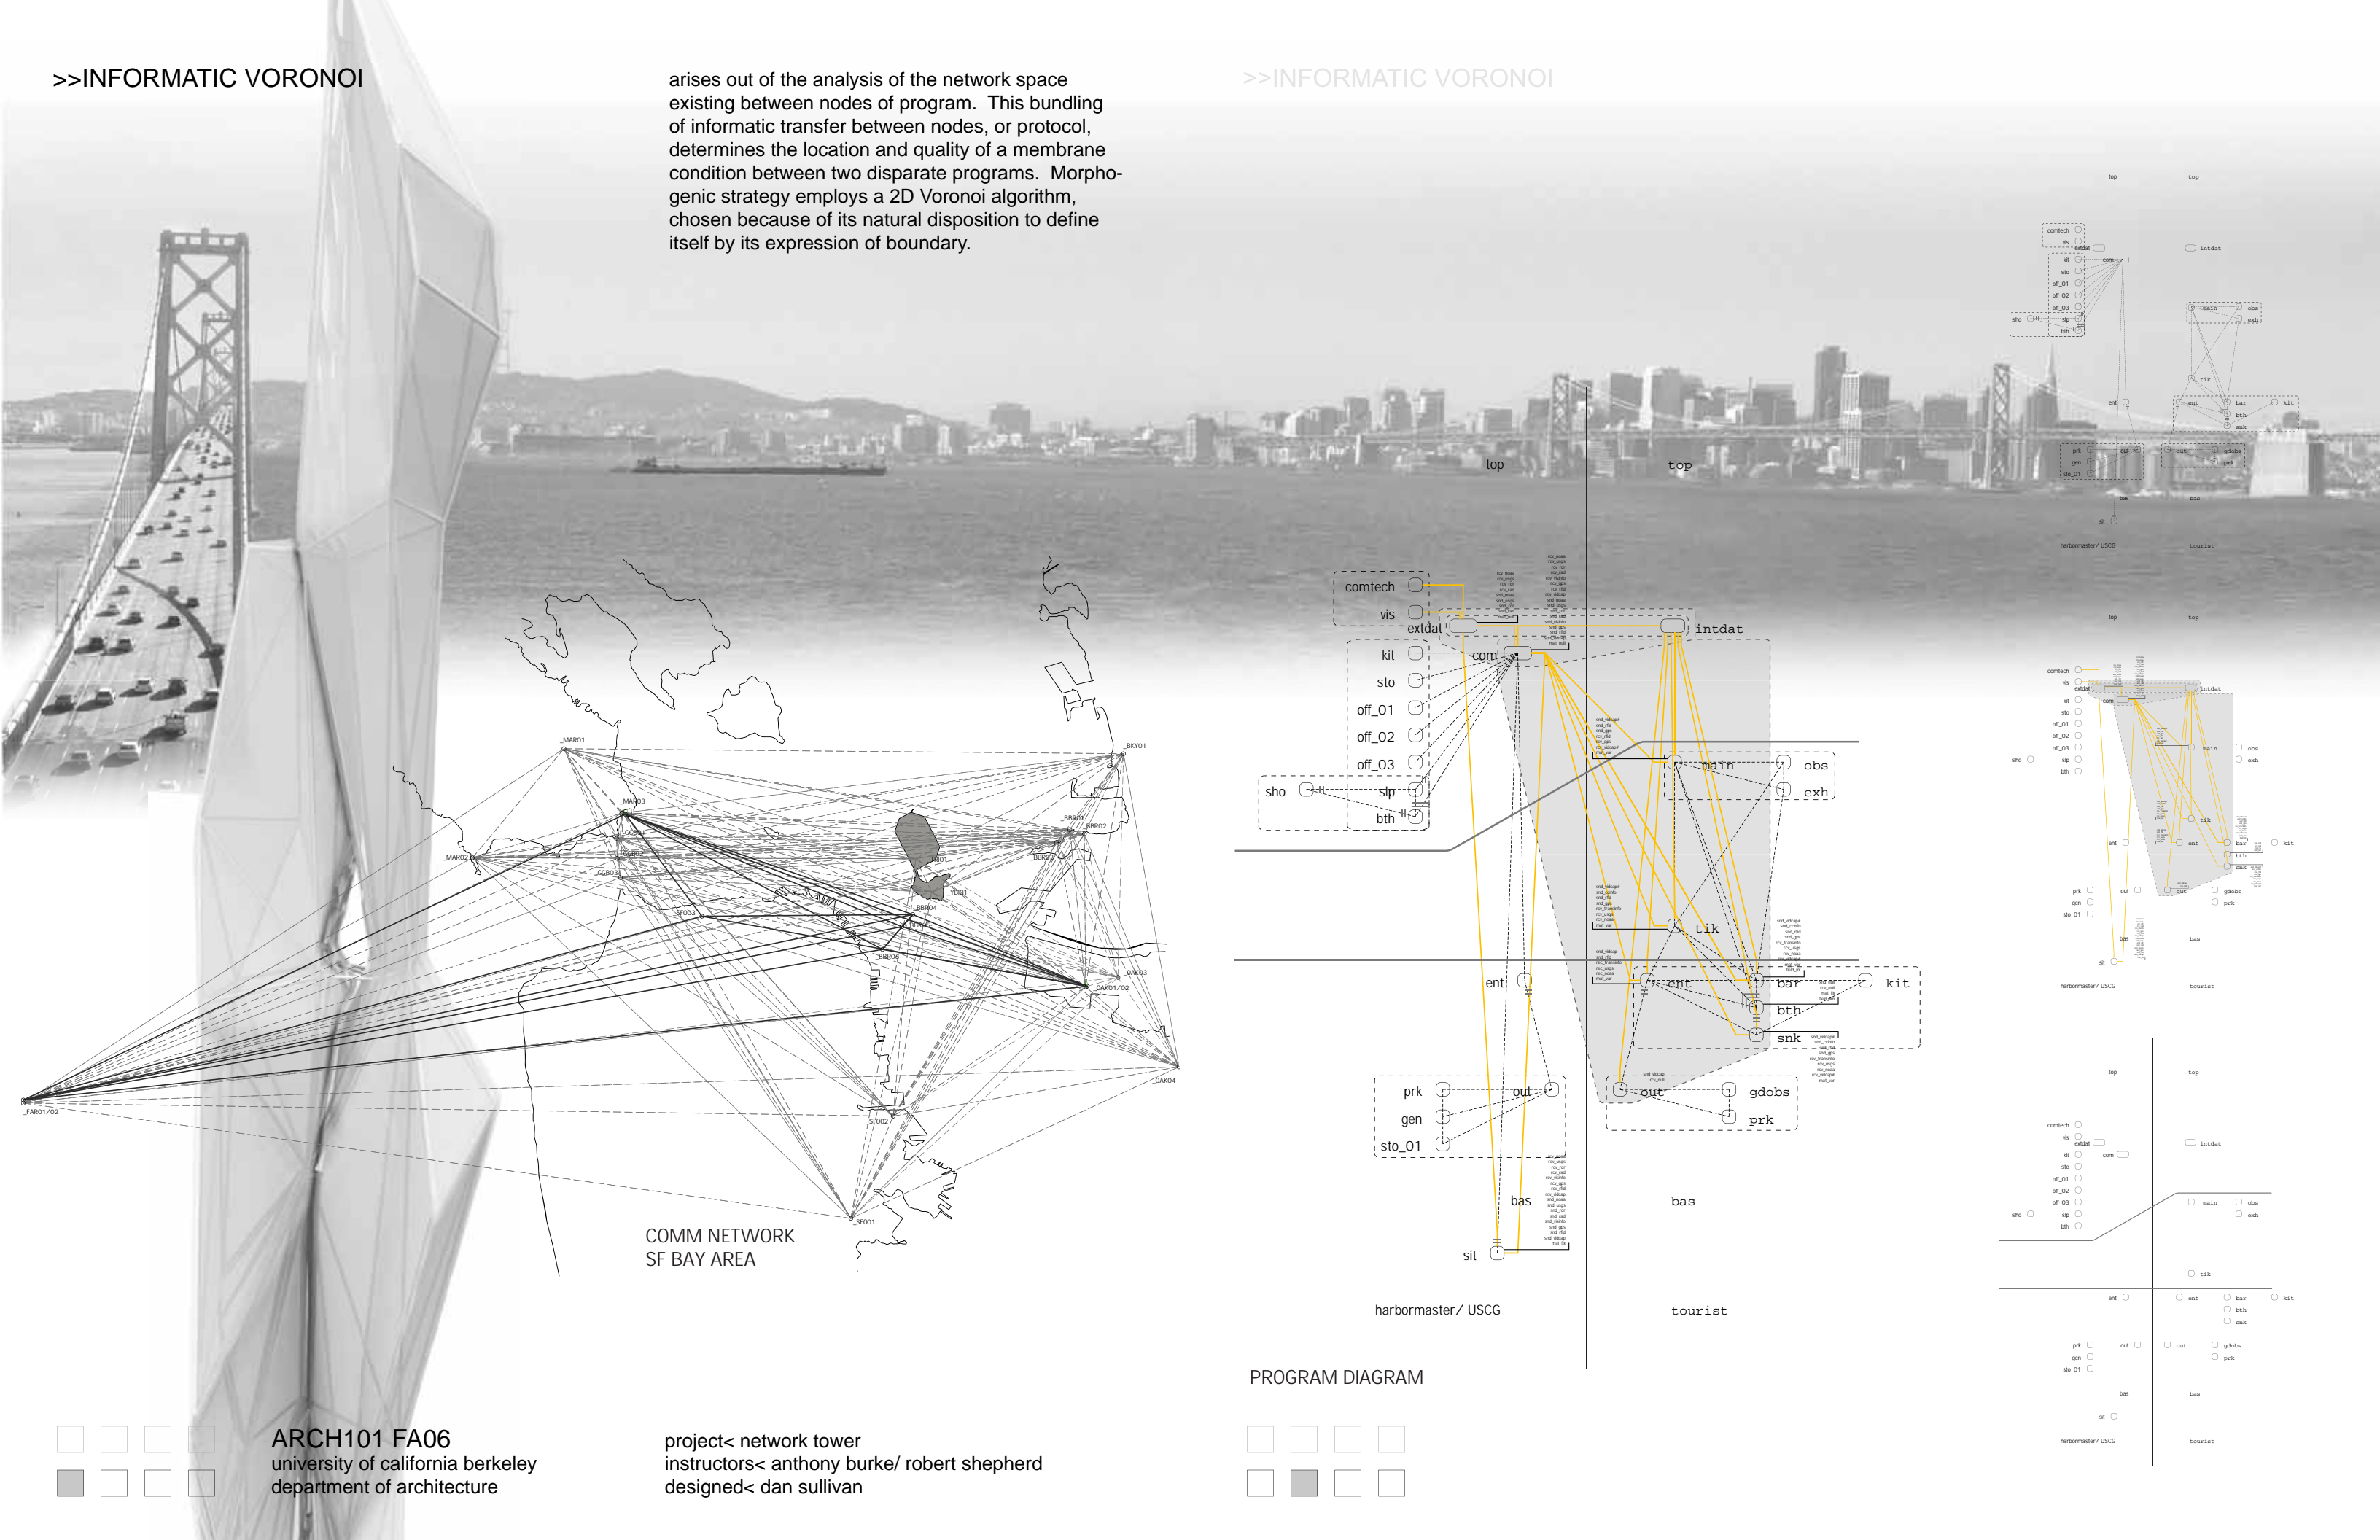

COMM NETWORK SF BAY AREA

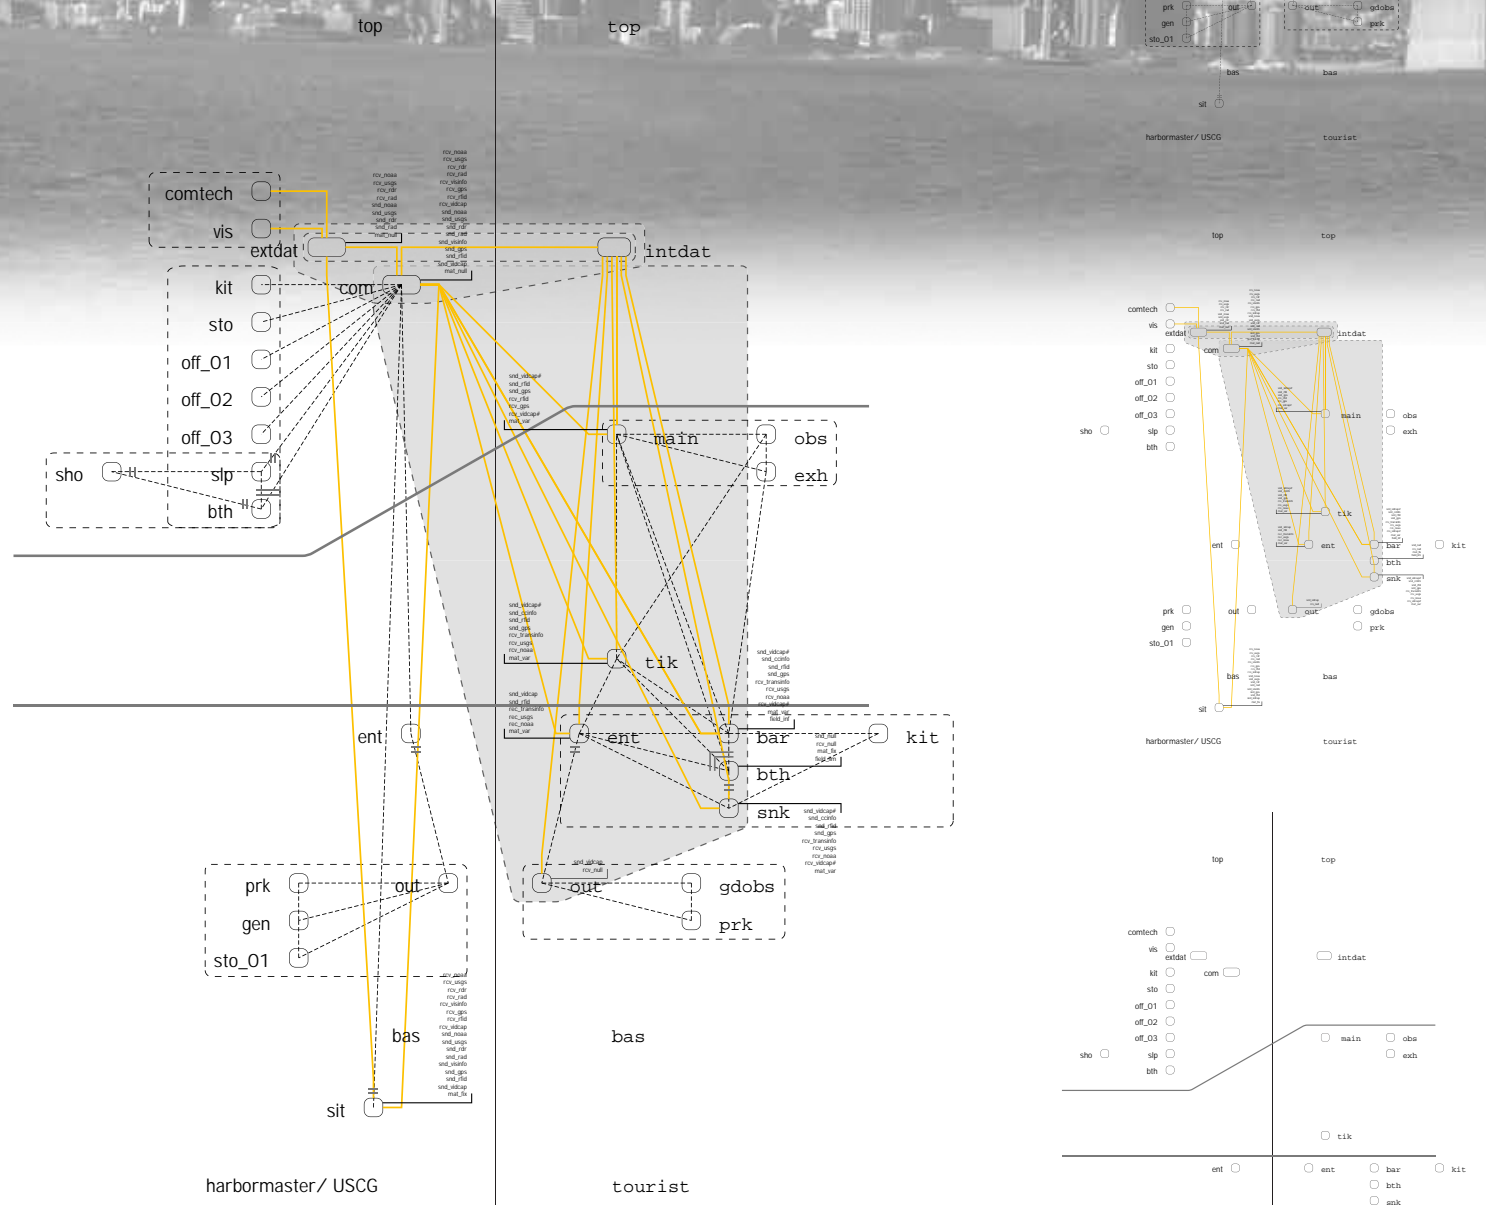



PROGRAM DIAGRAM




ARCH101 FA06
university of california berkeley
department of architecture

project< network tower
instructors< anthony burke/ robert shepherd
designed< dan sullivan

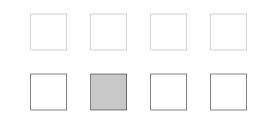


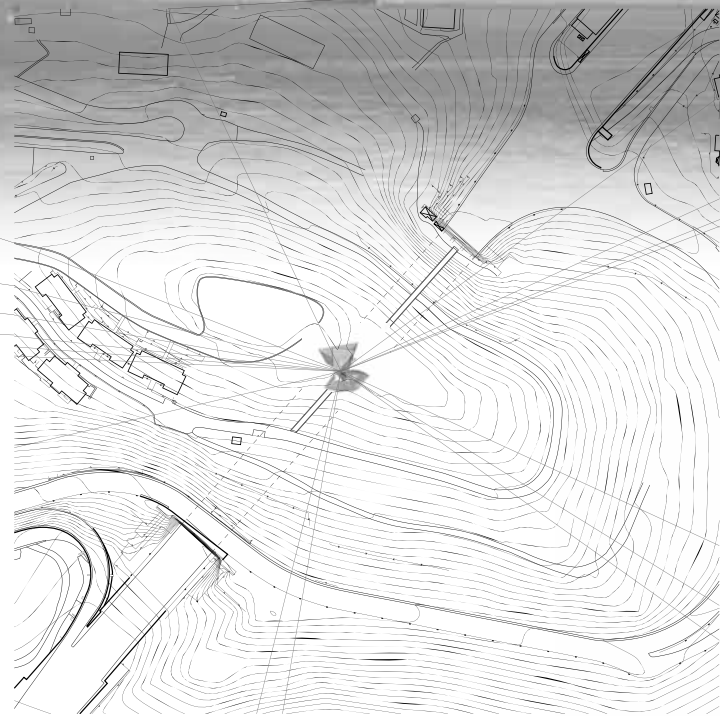

SITE PLAN
nts

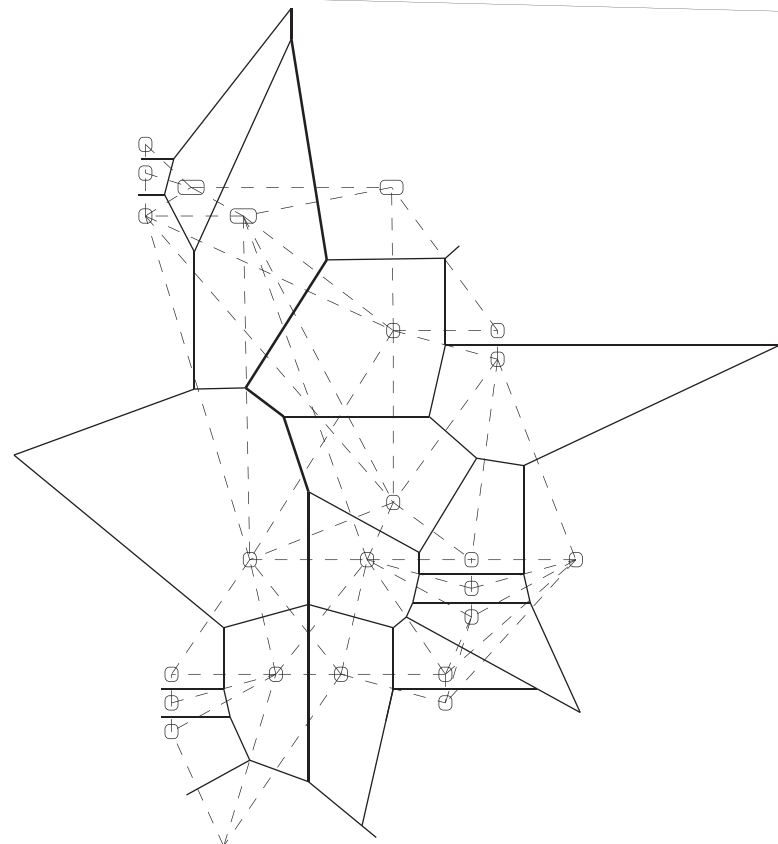

VORONOI DIAGRAM

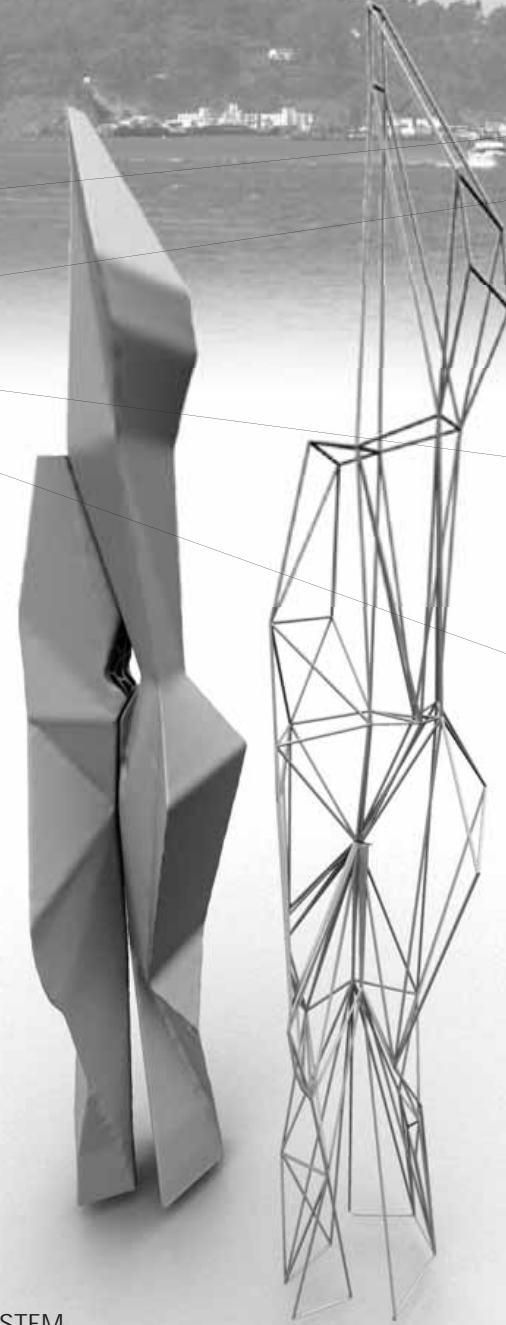

STRUCTURAL SYSTEM

